




ATRAACE

Quick Auto



ATRAACE WA-5000 Max. 2"



Advanced Technology Reducing Hole Drilling Cost



Features


- 2" x 3" hole drilling capacity
- Semi-automatic feed mechanism
- Powerful 1100 watt double insulated motor
- Overload stop detection system helps prevent motor and cutter damage
- Load detection system monitors and regulates motor speed and cutting feed
- Sealed arbor system with through spindle coolant
- Built-in motion detection sensor
- One-Touch arbor system "No tools required for cutter installation and removal"
- Accepts Jetbroach carbide tipped and Hibroach HSS annular cutters
- Precision machined die cast aluminum mainframe, motor slide and arbor support bracket
- One year limited warranty

Specifications

Model		WA-5000	
Power Source (Single / Phase)		110 → 120 V AC	220 → 240 V AC
		50 / 60 Hz	50 / 60 Hz
Electric Drill	Rated Power Consumption	W	
	Rated Current	A	
	No Load Speed	rpm (r/min)	
Magnet Power Consumption	W		75
Hole-drilling Capacity	Cutter	Hole Diameter	Plate Thickness
	Over-load type JETBROACH TBL	17.5 to 50 mm (1 1/8" to 2")	8 to 75 mm (3/8" to 3")
	Over-load type HIBROACH HSL	14 to 50 mm (9/16" to 2")	8 to 50 mm (5/8" to 2")
Magnet Holding Power	N (kg) (Lbs)	5,800 (1,000) (9,200)	
Magnet Dimensions	mm (Inches)	121 x 201 (4" x 8")	
Mass (Weight)	kg (Lbs)	28 (51)	

Semi-Automatic Feed

Activates simply by positioning feed handles inward toward machine frame

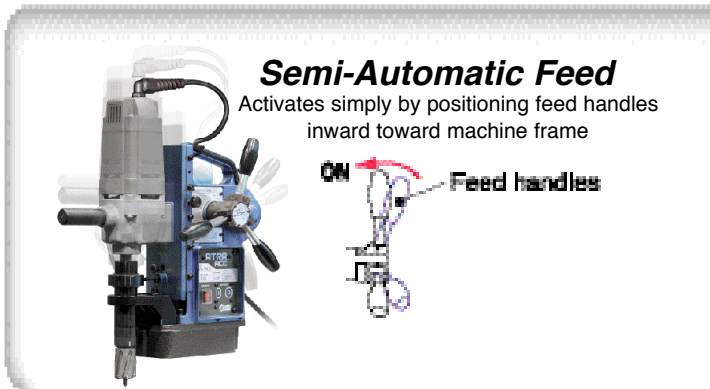

Standard Accessories

- 2" pilot pin #UEA0850-0
- Safety chain
- Motor-side handle
- 3 mm allen wrench
- 8 x 10 mm combination wrench
- Sample cutting fluid
- Molded plastic carrying case