

Vacuum Pump DLP2540



Electric Screwdrivers can be used with Vacuum Pump and Vacuum Pickup to facilitate easy pickup. The vacuum Pickup sleeve picks up the screw and holds it on the bit, thus improving operational efficiency and operator's productivity.


| Model | DLP2540 | |
|----------------------|-------------------------|--------------------------------------|
| Input Voltage | 115 V AC, 50/60 Hz | |
| No-load Current | A | 1/0.75 |
| Power Consumption | W | 30/26 |
| Achievable Vacuum | mmHg(kPa) | -160 (-21.3) |
| Flow Rate at Outlet | L/min | 24/26 |
| Weight | lbs(kg) | 8.36 (Approx. 3.8) except Power Cord |
| Size W x L x H | in(mm) | 6.1" x 7.3" x 5.5" (152 x 182 x 138) |
| Standard Accessories | Power Cord Assembly : 1 | |

Linicon (Vacuum Pump)



| Model | LV-125A | |
|-----------------------|---|------------|
| Voltage | 115 V AC | |
| Power Consumption | 14 W | |
| Rated Frequency | 60 Hz | |
| Maximum Vacuum | -33.3 kPa (-250 mmHg, -333 mbar, -9.84 in. Hg) | |
| Dimensions | 5.31" (L) x 3.58" (W) x 5.75" (H) (135 mm x 91 mm x 146 mm) | |
| Duty Cycle | Continuous | |
| Coil Insulation Class | B or its equivalent | |
| Weight | lbs [g] | 3.3 [1500] |
| Accessories | MICRO CUPLA (MC-04PH) 1 piece | |

Shaker Box Made of Anti-electrostatic Resin

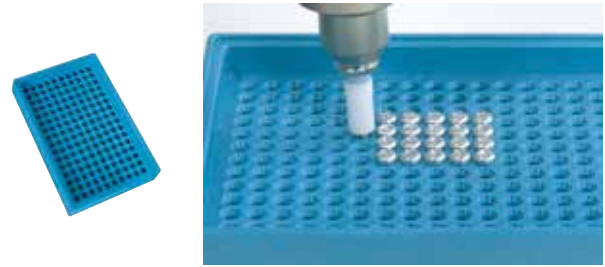

The screws will fall into the heads-up position for easier vacuum or magnetic pickup. The anti-electrostatic resin greatly reduces static build-up and dust attached to the shaker box.

| Model | Part No. | Hole Pitch | Hole Depth | No. of Holes | Screw Size(for reference) | |
|---------|----------|------------|------------|--------------|---------------------------|----------------------|
| | | | | | inch thread | metric coarse thread |
| DLW3402 | TD04110 | 0.24" | 0.53" | 273 | #2 or less | 1.7 - 2 mm |
| DLW3602 | TD04111 | 0.24" | 0.53" | 273 | #2 - #3 | 2 - 2.6 mm |
| DLW3802 | TD04112 | 0.31" | 0.49" | 160 | #4 - #8 | 3 - 4 mm |

Linicon (Vacuum Pump)



| Model | LV-660-D1 | |
|-----------------------|---|-------------|
| Voltage | 115 V AC | |
| Power Consumption | 70 W | |
| Rated Frequency | 60 Hz | |
| Maximum Vacuum | -80 kPa (-600 mmHg, -800 mbar, -23.6 in. Hg) | |
| Dimensions | 9.49" (L) x 7.0" (W) x 8.03" (H) (241 mm x 177 mm x 204 mm) | |
| Duty Cycle | Continuous | |
| Coil Insulation Class | B or its equivalent | |
| Weight | lbs [g] | 13.9 [6300] |
| Accessories | SUPER CUPLA (02SM • 02PH) Each 1 piece | |